

# JA-123E-NFC (JABLOTRON 100+)

Print / Save as PDF

If you want to save to PDF, please select 'Save as PDF' when the print dialog opens.

## Bus outdoor keypad with RFID reader 13,56 MHz

**Type: 1KPAD2318LU**

switch to the short version of manual

*The keypad is a component of **JABLOTRON** system. The keypad with contactless RFID reader is used to control the alarm system, to activate a PG output and to control access to the building. The keypad features one control segment, a reading surface and optical signalling. The product is suitable for indoor and outdoor use and is powered from the control panel bus. The product is designed for installation by a trained technician with a valid Jablotron certificate.*


## Installation



**Always connect the bus when the system is completely powered off.**

1. Remove the locking screw (6) and open the keypad cover.
2. Install the plastic base to a chosen place on a wall so that the tamper contact (5) can be sufficiently compressed when the installation is complete.
3. Pull the keypad cable through the hole in the plastic base.

4. Connect the bus cable into the terminal blocks according to the colours and markings – red terminal +U, yellow A, green B, black GND. For connection outside the armed area, we recommend using the JA-110T isolator.
5. Follow the instructions stated in the control panel installation manual. Basic procedure:
  - a. Once powered on, the yellow LED (3) flashes to indicate that the keypad is not assigned to the system.
  - b. Open the F-Link software, select an unused position in the Devices tab and click on the Enrol button to enter the Enrolment mode.
  - c. Press the tamper, this action enrolls the keypad and the yellow LED turns off.
6. Close the product cover and secure it with the locking screw (6).

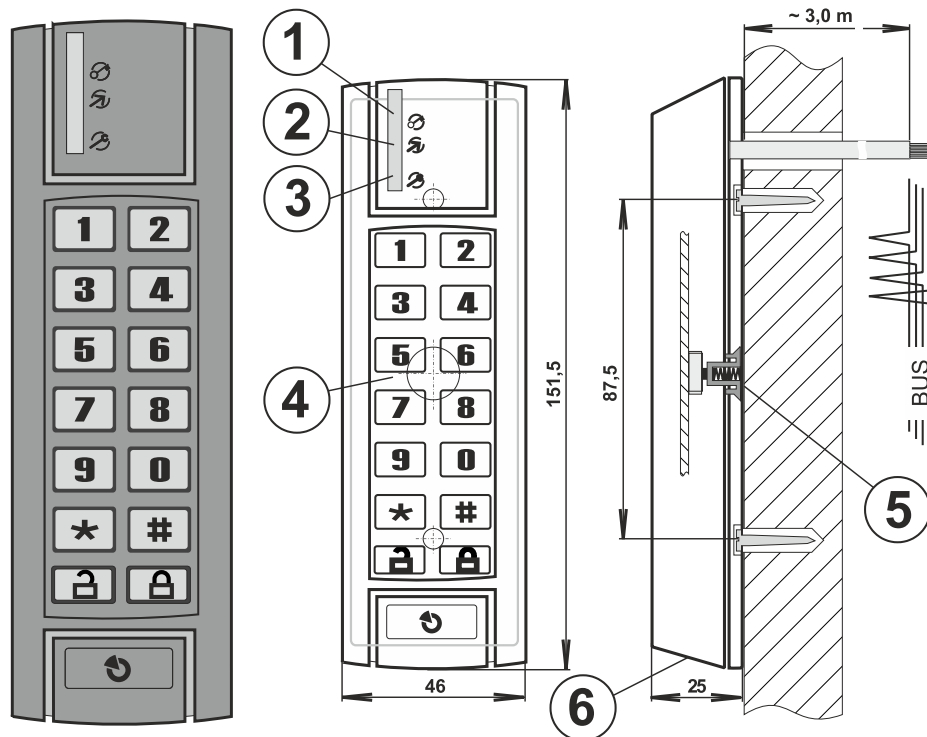

*Fig. 1: Description of the external and internal parts of the keypad*

*1 – red LED – indicates armed section; 2 – green LED – indicates disarmed section; 3 – yellow LED – indicates fault/service/not- assigning to the system; 4 – keypad and reading surface; 5 – tamper; 6 – locking screw;*

## Setting the properties

To set the properties, use the F-Link program, select the **Devices** tab. At the product/keypad position, click the **Enter** prompt in the **Internal settings** column.

Section and PG output control is performed by the means of buttons with locks.

Optical indication shows the status of a function assigned to the segment. Red LED indicates an armed/turned on PG. Green LED indicates a disarmed section/turned off PG. Yellow LED

indicates a fault by permanent light.

The asterisk symbol \* signifies the factory default setting.

## Segment function (section/PG selection)

\*None / Unsetting / Setting / Section indication / PG Off/On / PG ON / PG OFF / PG indication / PG indicates inversely

\*Options **Unsetting/Setting, PG Off/On / PG ON / PG OFF** allow you to enable requiring authorization every time you control a segment. If this option is disabled, authorization is only required during unsetting. (A segment can control a different section than it is assigned to).

### Acoustic indication of selected sections

**Alarm: \*On/Off:** Signalizes ongoing alarm in an assigned section.

**Entrance delay: \*On/Off:** Signalizes entry delay in a section to which it is assigned.

**Exit delay: \*On/Off:** Signalizes exit delay in a section to which it is assigned.

**Exit delay when partially set: On/\*Off**

**Segment status change:** Keypad acoustic indicates section to which is assigned.

**Mute: On/\*Off:** If it is selected ON, keypad will not acoustic signalize exit, alarm and push keypad buttons etc.

## Properties and indication

Behaviour of optical indication may be set in the F-Link software by selecting from the following options:

**Indicates permanently** – LED 1 or LED 2 lights up permanently/signals the status of the PG/section.

**By pressing only** – by pressing a key or applying a card/chip, the signalling is activated and the LED displays the status of the PG/section for 8 seconds.

**After valid authorisation in acc. with EN50131-1** – by entering the password or by reading a card of a user that is defined within the system, the current status of a PG/section

is displayed.

## Backlight intensity

May be adjusted with a slider in **F-link**.

## Authorised action

**Authorisation triggers an entrance delay: On/Off\***: If the section, in which the reader is assigned, is in an armed state, authorisation by the means of reading a card induces an entry delay. Simultaneously it activates a PG. If the section in which the keypad is assigned is in an armed state, authorization by reading a card will result in an entry delay. It simultaneously activates the PG marked by the Controls PG option.


The keypad can be used to control PGs that have the Impulse or Change function set. These functions can be set in the internal settings of the F-link.

## Technical specifications

|   |  |
|---|--|
| <b>Power</b>                                | from the control panel bus, 12 V, DC (8-15 V)        |
| <b>Quiescent current consumption</b>        | 15 mA  |
| <b>Maximal current consumption</b>          | 80 mA  |
| <b>Type of control device</b>               | 13,56 MHz  |
| <b>Maximum RFID magnetic field strength</b> | 10,37 dBuA/m (3 m)                                   |
| <b>Compatible RFID card</b>                 | NFC, Mifare® Classic, Mifare® DESFire® 4, 7 Byte UID |
| <b>Dimensions</b>                           | 46 x 151,5 x 25 mm                                   |
| <b>Weight</b>                               | 196 g  |
| <b>Connection cable length</b>              | 3,0 m  |
| <b>Operating temperature range</b>          | -25 °C to +60 °C                                     |
| <b>Relative humidity</b>                    | 75% without condensation                             |
| <b>Environment according to</b>             | IV. Outdoor general                                  |

**Classification**

Grade 2 according to EN 50131-1, EN 50131-3

**Additionally in compliance with**ETSI EN 300330, EN 50130-4, EN 55032, EN 62368-1,  
EN IEC 63000**Recommended screw**3 x  ø 3.5 x 40 mm (flat head)

**MIFARE® is a registered trademark owned by NXP B.V. There is no affiliation between NXP B.V. and Jablotron Alarms a.s.**



JABLOTRON ALARMS a.s. hereby declares that the product 1KPAD2318LU is in compliance with the relevant Union harmonisation legislation: Directives No: 2014/53/EU, 2014/35/EU, 2014/30/EU, 2011/65/EU. The original of the conformity assessment can be found at [www.jablotron.com](http://www.jablotron.com) – Section Downloads.



**Note:** Disposing of this product correctly will help save valuable resources and prevent any potential negative effects on human health and the environment, which could otherwise arise from inappropriate waste handling. Please return the product to the dealer or contact your local authority for further details of your nearest designated collection point.

JA-123E-NFC

MLU530702  
(29.08.2024)