

# MODULAR 500




Fog emission and saturation:

up to 1500 m<sup>3</sup> in 48 seconds  
(500 m<sup>3</sup> visibility less than 1 m)

A compact and light fogging system, inside the cabinet, even if small in size, it is possible to place optional boards in special spaces such as alarm panels, sensors, etc.

The front cover is made of plastic material to make the wireless communication easier between the internally installed devices and the outside.

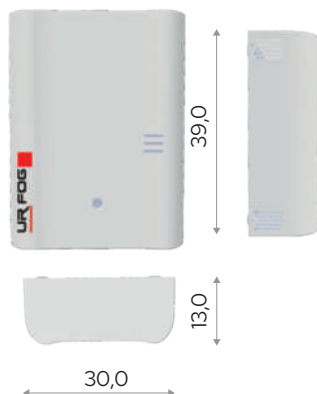

**UR FOG  
FOG  
STORM**

Fogging system with patented PUMP and "LAYER" heating TECHNOLOGIES

Compact cabinet	yes
Weight of the fogging system	9 Kg
Overall packaging weight	10 Kg
Units on one pallet (100×120 cm)	42
Dimension of the machine	L 30,0 x x W 13,0 H 39,0 cm
Dimension of the packaging	L 36,0 x W 19,0 x H 45,0 cm
Colors	white - optional black
Operating time without mains power	over 1 hour
Heating time	around 2 hours
Vertical mounting	yes
Horizontal mounting	yes
Usb port for computer monitoring (Windows and Linux)	yes
Serial interface RS232 with UR FOG Standard protocol	yes
Lan Connection : Active Cloud	optional

"Layer" heating system	yes
Single shot coverage (visibility more than 1,5 m)	up to 1500 m <sup>3</sup>
Single shot coverage (visibility less than 1 m)	up to 500 m <sup>3</sup>
Maximum emission time in a single shot	48 sec
Total discharge capability with full bag	1275 m <sup>3</sup>
Number of bags	1
Amount of fluid in the bag	750 ml
Shot characteristics	programmable in seconds
Number of bags included	1
2 cabled inputs: arming and shooting	yes
1 cabled output: fault (empty bag, low battery/lack of power supply, system failure)	yes
Top internal riser for optional boards	yes
Side internal riser for optional boards	yes
Front panel in plastic material	yes

## ELECTRICAL SPECIFICATIONS

Mains power	230 V or 120 V
Average consumption	48 W
Heater max power in start	280 W
2 Ah 12V back up battery (not included)	yes

FOG FLUID  
CERTIFIED

Complies with  
european  
CE

Meets  
EUROPEAN  
Standard